

CONNECTEURS COAXIAUX POUR CABLES CELLULAIRES


Catalogue 2015

CONNECTEURS /

- ★ *7/16 FLLE*
- ★ *7/16 MÂLE*
- ★ *N FLLE*
- ★ *N MÂLE*

CABLES /

- ★ *1/2" F & SF*
- ★ *3/8" F & SF*
- ★ *1/4" F & SF*
- ★ *7/8" F*

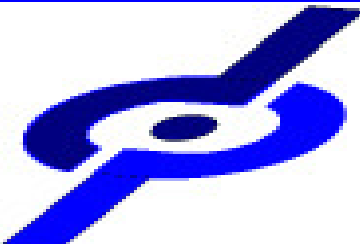

CABLES & CONNECTIQUES

1, RUE DE L'ÉGALITÉ 92220 BAGNEUX

TÉL. : 01-45-36-15-15

FAX : 01-45-36-15-10


E-MAIL : CETC@COAXFRANCE.FR

SOMMAIRE

	PAGE
A → CONNECTEURS COAXIAUX POUR CABLES 1/2" SUPERFLEX	
7/16 FLLE DROIT POUR CABLE 1/2" SUPERFLEXIBLE	1
7/16 MALE DROIT POUR CABLE 1/2" SUPERFLEXIBLE	2
7/16 MALE COUDÉ POUR CABLE 1/2" SUPERFLEXIBLE	3
N FLLE DROIT POUR CABLE 1/2" SUPERFLEXIBLE	4
N MALE DROIT POUR CABLE 1/2" SUPERFLEXIBLE	5
B → CONNECTEURS COAXIAUX POUR CABLES 1/2" FLEXIBLE	
7/16 FLLE DROIT POUR CABLE 1/2" FLEXIBLE	6
7/16 MALE DROIT POUR CABLE 1/2" FLEXIBLE	7
N FLLE DROIT POUR CABLE 1/2" FLEXIBLE	8
N MALE DROIT POUR CABLE 1/2" FLEXIBLE	9
N MALE COUDÉ POUR CABLE 1/2" FLEXIBLE	10
C → CONNECTEURS COAXIAUX POUR CABLES 3/8" SUPERFLEXIBLE	
7/16 MALE COUDÉ POUR CABLE 3/8" SUPERFLEXIBLE	11
7/16 MALE DROIT POUR CABLE 3/8" SUPERFLEXIBLE	12
D → CONNECTEURS COAXIAUX POUR CABLES 1/4" FLEXIBLE	
N MALE DROIT POUR CABLE 1/4" FLEXIBLE	13
N FLLE DROIT POUR CABLE 1/4" FLEXIBLE	14
E → CONNECTEURS COAXIAUX POUR CABLES 7/8" FLEXIBLE	
7/16 FLLE DROIT POUR CABLE 7/8" FLEXIBLE	15
N FLLE DROIT POUR CABLE 7/8" FLEXIBLE	16
F → ADAPTATEURS	
7/16 MD *7/16 MD	17
7/16FD*7/16FD	18
7/16FD*N MD	19
7/16MD*NMD	20
G → OUTILLAGE	22-23
H → FICHE DE MONTAGE	23-27




7/16 FLLE DROIT POUR CABLE 1/2 "SUPERFLEX

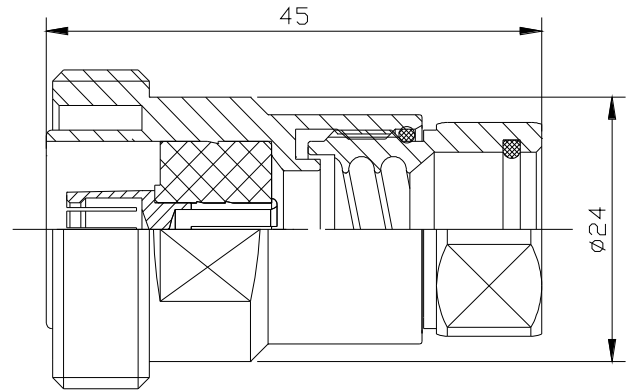

Code	DINF-1/2"H	
Description	7/16 straight female connector for 1/2" Super Flexible RF Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 7.5
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.40
Outer Conductor Contact Resistance	m Ω	≤ 0.20
Insertion Loss	dB	≤ 0.08
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.5 GHz	≤ 1.10
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	PTFE/TPX	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Working Temperature Range	$^{\circ}\text{C}$	-65~+165
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165




7/16 MALE DROIT POUR CABLE 1/2 "SUPERFLEX

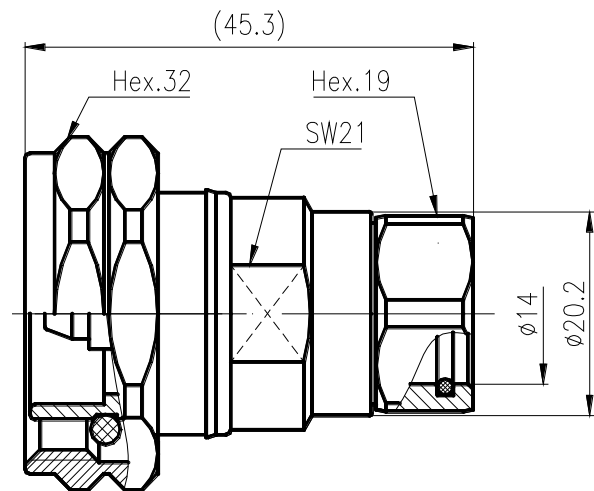

Code	DINM-1/2"H	
Description	DIN straight male connector for 1/2" Super Flexible RF Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 7.5
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.40
Outer Conductor Contact Resistance	m Ω	≤ 0.20
IM3	dBc	≤ -158
Insertion Loss	dB	≤ 0.05
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.5 GHz	≤ 1.10
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	PTFE/TPX	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Working Temperature Range	$^{\circ}\text{C}$	-85~+185
Storage Temperature Range	$^{\circ}\text{C}$	-85~+185




7/16 MALE COUDÉ POUR CABLE 1/2 "SUPERFLEX

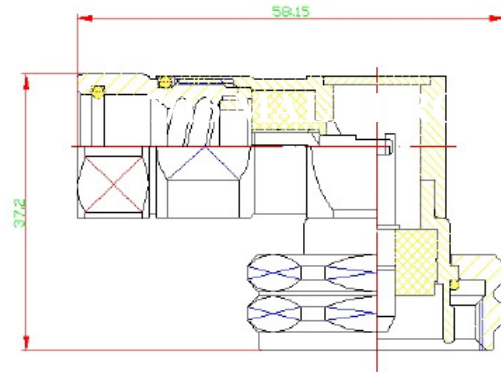

Code	DINMA-1/2"H	
Description	DIN male right angle connector for 1/2" Super Flexible RF Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 7.5
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.4
Outer Conductor Contact Resistance	m Ω	≤ 0.2
Insertion Loss	dB	≤ 0.05
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.5 GHz	≤ 1.10
Inner Conductor Pin		Brass / Silver Plating
Inner Conductor Socket		Tin Bronze / Silver Plating
Insulator		PTFE/TPX
Body & Outer Conductor		Brass / Trimetal Plating
Gasket		Silicon Rubber
Working Temperature Range	$^{\circ}\text{C}$	-65~+165
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165




N FLLE DROIT POUR CABLE 1/2 "SUPERFLEX

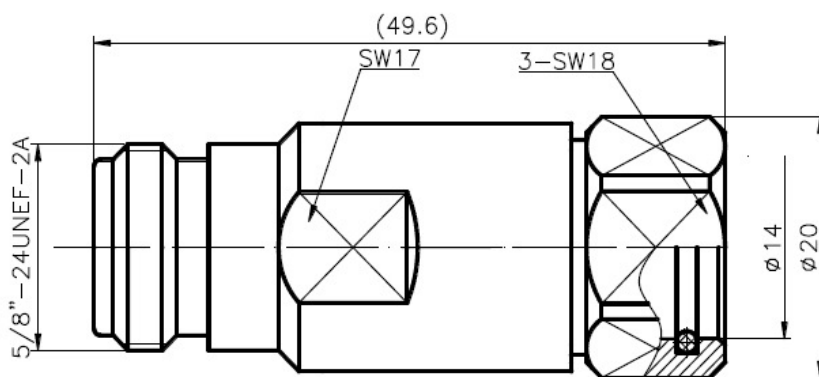

Code	NF-1/2"H	
Description	N straight female connector for 1/2" Super Flexible Coaxial Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 18
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.8
Outer Conductor Contact Resistance	m Ω	≤ 0.25
IM3	dBc	≤ -150
Insertion Loss	DC-3.0 GHz (dB)	≤ 0.09
Insulation Resistance	M Ω	≥ 5000
Dielectric Strength	V	2500
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.7 GHz	≤ 1.10
	2.7-3.0 GHz	≤ 1.13
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	TPX	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Working Temperature Range	$^{\circ}\text{C}$	-65~+85
Storage Temperature Range	$^{\circ}\text{C}$	-65~+85




N MALE DROIT POUR CABLE 1/2 "SUPERFLEX

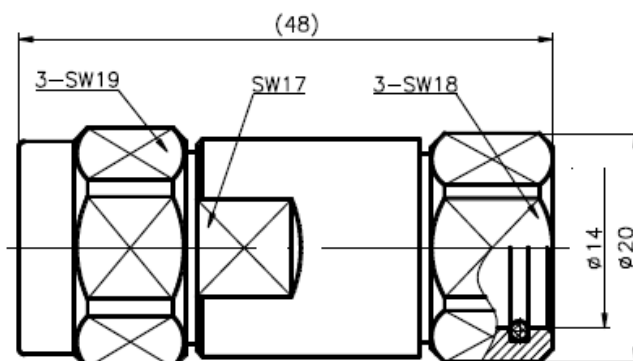

Code	NM-1/2"H	
Description	N straight male connector for 1/2" Super Flexible Coaxial Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 10
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.8
Outer Conductor Contact Resistance	m Ω	≤ 0.25
IM3	dBc	≤ -155
Insertion Loss	DC-3.0 GHz (dB)	≤ 0.09
Insulation Resistance	M Ω	≥ 5000
Dielectric Strength	V	2500
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.7 GHz	≤ 1.10
	2.7-3.0 GHz	≤ 1.13
Inner Conductor Pin		Brass / Silver Plating
Inner Conductor Socket		Tin Bronze / Silver Plating
Insulator		PTFE/TPX
Body & Outer Conductor		Brass / Trimetal Plating
Gasket		Silicon Rubber
Working Temperature Range	$^{\circ}\text{C}$	-65~+85
Storage Temperature Range	$^{\circ}\text{C}$	-65~+85




7/16 FLLE DROIT POUR CABLE 1/2 "FLEXIBLE

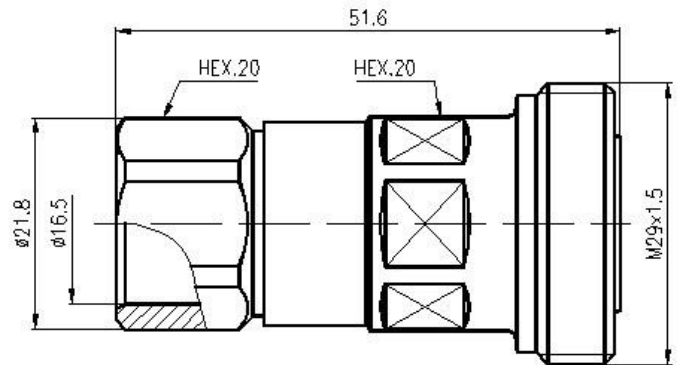

Code	DINF-1/2"L	
Description	7/16 straight female connector for 1/2" Flexible RF Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 7.5
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.40
Outer Conductor Contact Resistance	m Ω	≤ 0.20
Insertion Loss	dB	≤ 0.08
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.5 GHz	≤ 1.10
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	PTFE/TPX	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Working Temperature Range	$^{\circ}\text{C}$	-65~+165
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165




7/16 MALE DROIT POUR CABLE 1/2 "FLEXIBLE

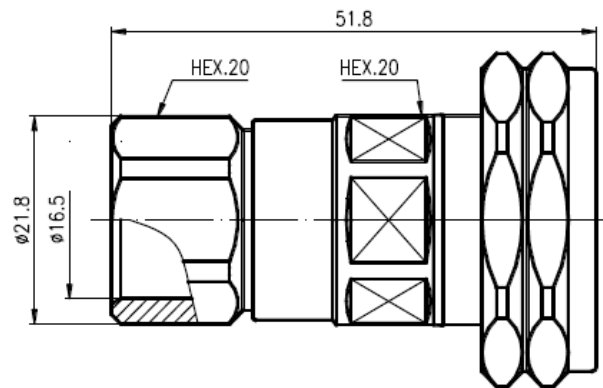

Code	DINM-1/2"L	
Description	7/16 straight male connector for 1/2" Flexible RF Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 7.5
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.40
Outer Conductor Contact Resistance	m Ω	≤ 0.20
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.08
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.5 GHz	≤ 1.10
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	PTFE/TPX	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Working Temperature Range	$^{\circ}\text{C}$	-65~+165
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165




N FLLE DROIT POUR CABLE 1/2 "FLEXIBLE

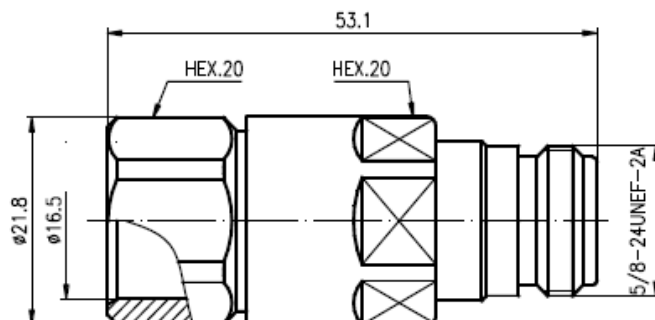

Code	NF-1/2"L	
Description	N Straight female Connector for 1/2" Flexible RF Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 18
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.8
Outer Conductor Contact Resistance	m Ω	≤ 0.25
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.10
Insulation Resistance	M Ω	≥ 5000
Dielectric Strength	V	2500
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.5 GHz	≤ 1.10
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	PTFE/TPX	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Working Temperature Range	$^{\circ}\text{C}$	-65~+165
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165




N MALE DROIT POUR CABLE 1/2 "FLEXIBLE

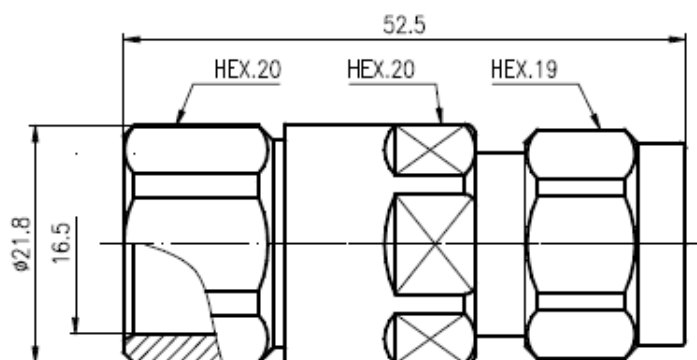

Code	NM-1/2"L	
Description	N Straight male Connector for 1/2" Flexible RF Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 18
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.8
Outer Conductor Contact Resistance	m Ω	≤ 0.25
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.10
Insulation Resistance	M Ω	≥ 5000
Dielectric Strength	V	2500
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.7 GHz	≤ 1.10
Inner Conductor Pin		Brass / Silver Plating
Inner Conductor Socket		Tin Bronze / Silver Plating
Insulator		PTFE/TPX
Body & Outer Conductor		Brass / Trimetal Plating
Gasket		Silicon Rubber
Working Temperature Range	$^{\circ}\text{C}$	-65~+165
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165




N MALE COUDÉ POUR CABLE 1/2 "FLEXIBLE

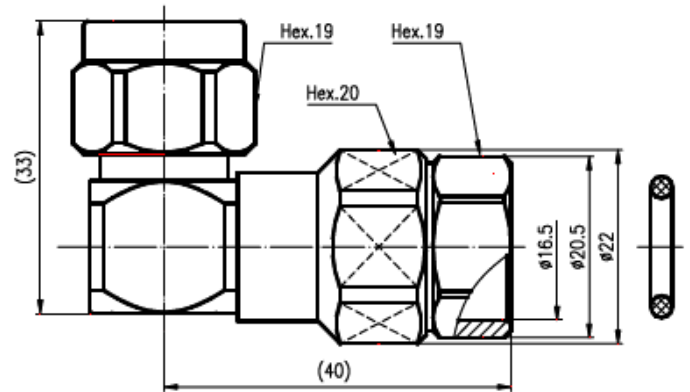

Code	NMA-1/2"L	
Description	N male right angle connector for 1/2" Flexible RF Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 18
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.8
Outer Conductor Contact Resistance	m Ω	≤ 0.25
Insertion Loss	dB	≤ 0.10
Insulation Resistance	M Ω	≥ 5000
Dielectric Strength	V	2500
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.5 GHz	≤ 1.10
Inner Conductor Pin		Brass / Silver Plating
Inner Conductor Socket		Tin Bronze / Silver Plating
Insulator		PTFE/TPX
Body & Outer Conductor		Brass / Trimetal Plating
Gasket		Silicon Rubber
Working Temperature Range	$^{\circ}\text{C}$	-65~+165
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165




7/16 MALE COUDÉ POUR CABLE 3/8 " SUPERFLEX

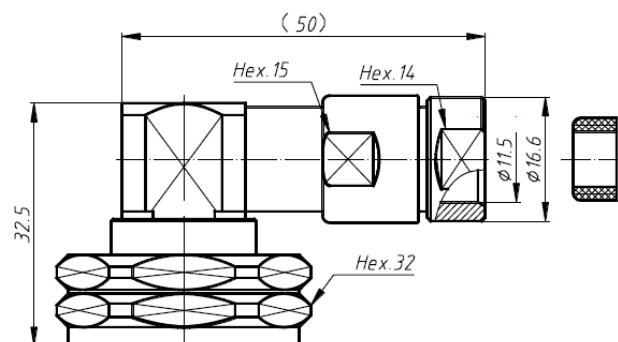

Code	DINMA-3/8"H	
Description	DIN Right angle male connector for 3/8" Super Flexible RF Cable	
Characteristic Impedance	Ω	50
Frequency Range	GHz	≤ 7.5
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.40
Outer Conductor Contact Resistance	m Ω	≤ 0.20
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.08
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	0.8-1.0 GHz	≤ 1.10
	1.7-2.5 GHz	≤ 1.13
Inner Conductor Pin		Brass / Silver Plating
Inner Conductor Socket		Tin Bronze / Silver Plating
Insulator		PTFE/TPX
Body & Outer Conductor		Brass / Trimetal Plating
Gasket		Silicon Rubber
Working Temperature Range	$^{\circ}\text{C}$	-65~+85
Storage Temperature Range	$^{\circ}\text{C}$	-65~+85




7/16 MALE POUR CABLE 3/8" SUPERFLEX

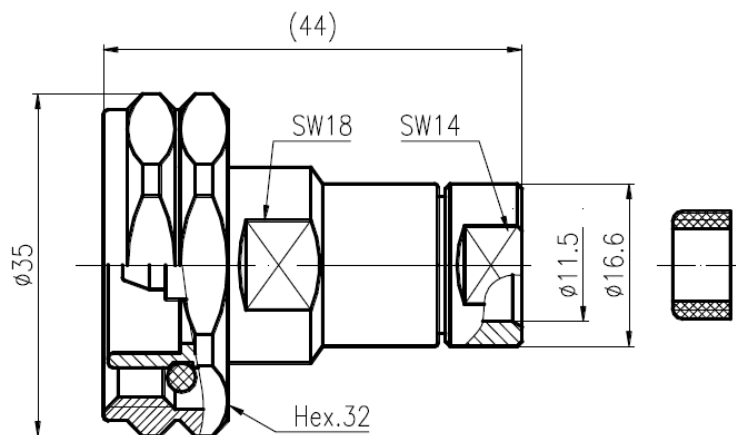

Code	DINM-3/8"H	
Description	DIN straight male connector for 3/8" Super Flexible RF Cable	
Characteristic Impedance	Ω	50
Frequency Range	GHz	≤ 7.5
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.40
Outer Conductor Contact Resistance	m Ω	≤ 0.20
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.08
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	0.8-1.0 GHz	≤ 1.10
	1.7-2.5 GHz	≤ 1.13
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	PTFE/TPX	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Working Temperature Range	$^{\circ}\text{C}$	-65~+85
Storage Temperature Range	$^{\circ}\text{C}$	-65~+85




N MALE POUR CABLE 1/4" FLEXIBLE

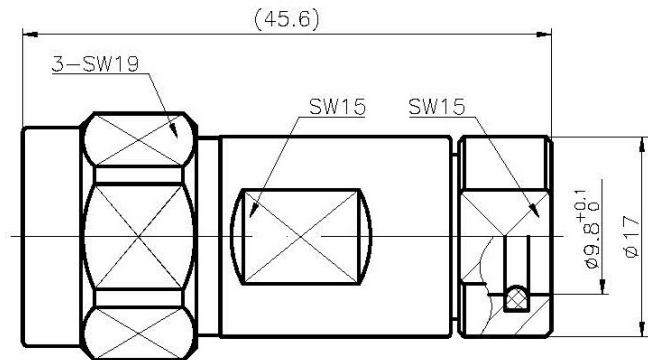

Code	NM-1/4"L	
Description	N straight male connector for 1/4" Flexible RF Cable (50 Ohm)	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 18
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.8
Outer Conductor Contact Resistance	m Ω	≤ 0.25
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.10
Insulation Resistance	M Ω	≥ 5000
Dielectric Strength	V	2500
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.7 GHz	≤ 1.10
Inner Conductor Pin		Brass / Silver Plating
Inner Conductor Socket		Tin Bronze / Silver Plating
Insulator		PTFE/TPX
Body & Outer Conductor		Brass / Trimetal Plating
Gasket		Silicon Rubber
Waterproof		IP68
Working Temperature Range	$^{\circ}\text{C}$	-65~+165
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165




N MALE POUR CABLE 1/4" SUPERFLEX

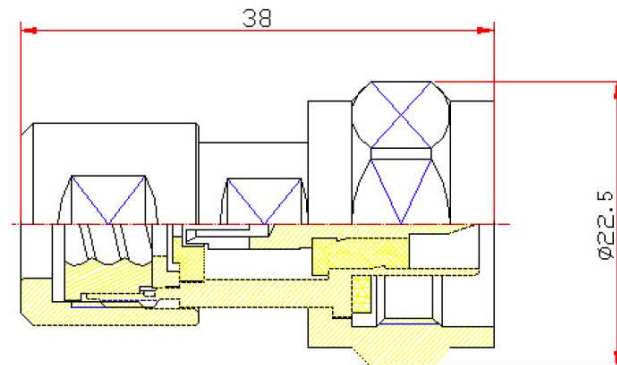

Code	NM-1/4"H	
Description	N straight male connector for 1/4" Super-flex RF Cable (50 Ohm)	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 18
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.8
Outer Conductor Contact Resistance	m Ω	≤ 0.25
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.10
Insulation Resistance	M Ω	≥ 5000
Dielectric Strength	V	2500
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.7 GHz	≤ 1.10
Inner Conductor Pin		Brass / Silver Plating
Inner Conductor Socket		Tin Bronze / Silver Plating
Insulator		PTFE/TPX
Body & Outer Conductor		Brass / Trimetal Plating
Gasket		Silicon Rubber
Waterproof		IP68
Working Temperature Range	$^{\circ}\text{C}$	-65~+165
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165




7/16 FLLE POUR CABLE 7/8" FLEXIBLE

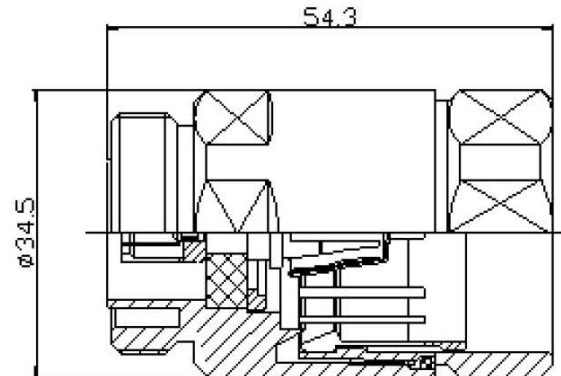


Code	DINF-7/8"LA	
Description	7/16 Straight Female Connector for 7/8" Flexible RF Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 7.5
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.40
Outer Conductor Contact Resistance	m Ω	≤ 0.20
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.08
Insulation Resistance	M Ω	≥ 10000
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.7 GHz	≤ 1.10
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	PTFE/TPX	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Waterproof	IP68	
Working Temperature Range	$^{\circ}\text{C}$	-65~+165
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165




N FLLE POUR CABLE 7/8" FLEXIBLE

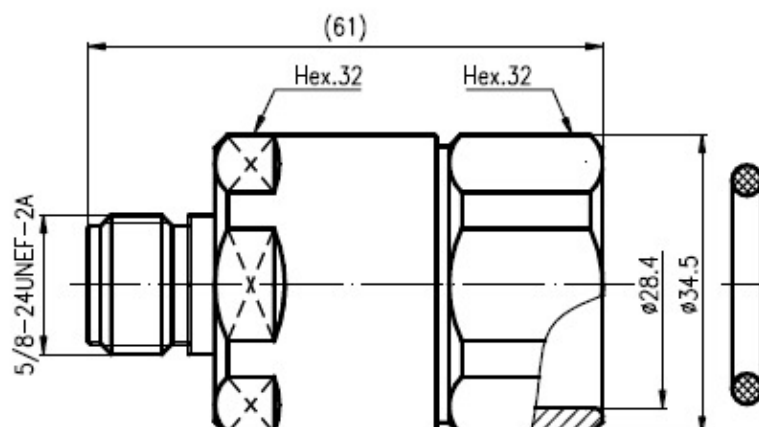


Code	NF-7/8"L	
Description	N straight female connector for 7/8" Flexible RF Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 18
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.40
Outer Conductor Contact Resistance	m Ω	≤ 0.20
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.08
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.7 GHz	≤ 1.10
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	TPX	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Working Temperature Range	$^{\circ}\text{C}$	-65~+85
Storage Temperature Range	$^{\circ}\text{C}$	-65~+85

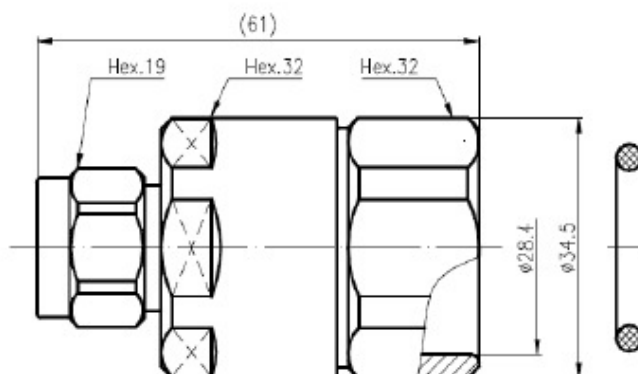


Code	NM-7/8"L	
Description	N straight male connector for 7/8" RF Cable	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 6
Shielding Efficiency	dB	≥ 115
Inner Conductor Contact Resistance	m Ω	≤ 0.8
Outer Conductor Contact Resistance	m Ω	≤ 0.25
Insertion Loss	dB	≤ 0.10
Insulation Resistance	M Ω	≥ 5000
Dielectric Strength	V	2500
VSWR	0.8-1.0 GHz	≤ 1.08
	1.7-2.5 GHz	≤ 1.10
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	PTFE/TPX	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Working Temperature Range	$^{\circ}\text{C}$	-65~+165
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165

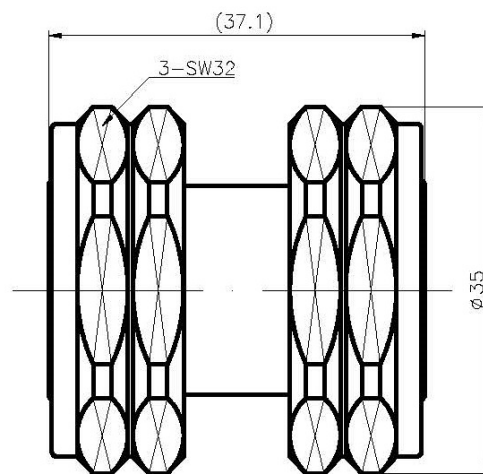


Code	DINM-DINM	
Description	Adapter, DIN Male to DIN Male	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 7.5
Inner Conductor Contact Resistance	m Ω	≤ 0.40 (DIN)
Outer Conductor Contact Resistance	m Ω	≤ 0.20 (DIN)
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.02
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	DC-1.0 GHz	≤ 1.04
	1.0-2.7 GHz	≤ 1.06
	2.7-3.7 GHz	≤ 1.10
Inner Conductor Pin		Brass / Silver Plating
Inner Conductor Socket		Tin Bronze / Silver Plating
Insulator		PTFE
Body & Outer Conductor		Brass / Trimetal Plating
Gasket		Silicon Rubber
Waterproof		IP68
Working Temperature Range	$^{\circ}\text{C}$	-65~+85
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165

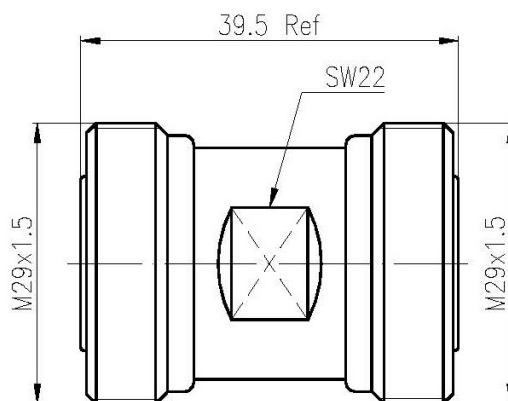

Code	DINF-DINF	
Description	Adapter,DIN Female to DIN Female	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 7.5
Inner Conductor Contact Resistance	m Ω	≤ 0.40 (DIN)
Outer Conductor Contact Resistance	m Ω	≤ 0.20 (DIN)
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.02
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	DC-1.0 GHz	≤ 1.04
	1.0-2.7 GHz	≤ 1.06
	2.7-3.7 GHz	≤ 1.10
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	PTFE	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Waterproof	IP68	
Working Temperature Range	$^{\circ}\text{C}$	-65~+85
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165

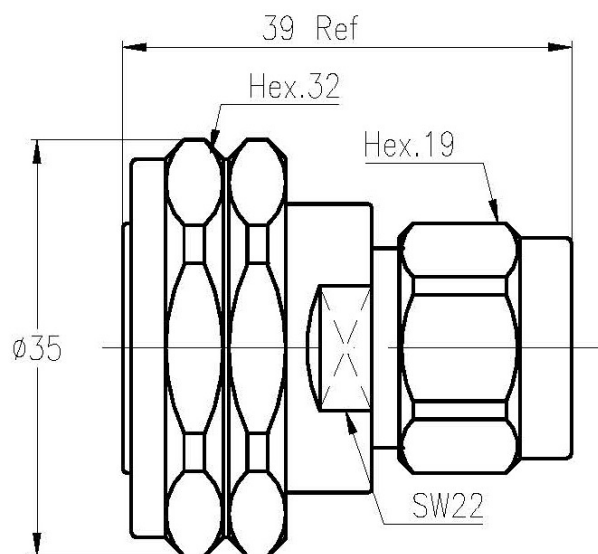

Code	DINM-NM	
Description	Adapter,DIN Male to N Male	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 7.5
Inner Conductor Contact Resistance	m Ω	≤ 0.40 (DIN) ≤ 0.80 (N)
Outer Conductor Contact Resistance	m Ω	≤ 0.20 (DIN) ≤ 0.25 (N)
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.02
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	DC-1.0 GHz	≤ 1.04
	1.0-2.7 GHz	≤ 1.06
	2.7-3.7 GHz	≤ 1.10
Inner Conductor Pin	Brass / Silver Plating	
Inner Conductor Socket	Tin Bronze / Silver Plating	
Insulator	PTFE	
Body & Outer Conductor	Brass / Trimetal Plating	
Gasket	Silicon Rubber	
Waterproof	IP68	
Working Temperature Range	$^{\circ}\text{C}$	-65~+85
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165

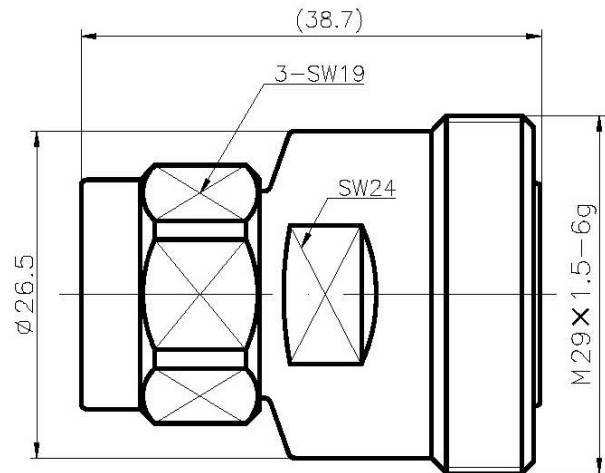

Code	NM-DINF	
Description	Adapter, N Male to DIN Female	
Characteristic Impedance	Ω	50
Cut-off Frequency	GHz	≤ 7.5
Inner Conductor Contact Resistance	m Ω	$\leq 0.40(\text{DIN}) \quad \leq 0.80(\text{N})$
Outer Conductor Contact Resistance	m Ω	$\leq 0.20(\text{DIN}) \quad \leq 0.25(\text{N})$
IM3	dBc	≤ -155
Insertion Loss	dB	≤ 0.02
Insulation Resistance	M Ω	≥ 10000
Dielectric Strength	V	3000
VSWR	DC-1.0 GHz	≤ 1.04
	1.0-2.7 GHz	≤ 1.06
	2.7-3.7 GHz	≤ 1.10
Inner Conductor Pin		Brass / Silver Plating
Inner Conductor Socket		Tin Bronze / Silver Plating
Insulator		PTFE
Body & Outer Conductor		Brass / Trimetal Plating
Gasket		Silicon Rubber
Waterproof		IP68
Working Temperature Range	$^{\circ}\text{C}$	-65~+85
Storage Temperature Range	$^{\circ}\text{C}$	-65~+165



OUTILLAGE

Cutting Tool

CT12/CT78



Code	CT12
Description	Cutting Tool for 1/2" RF Cable
Main Material	Nylon
Material of Parts	Stainless Steel
Spare Blade	Two
Code	CT78
Description	Cutting Tool for 7/8" RF Cable
Main Material	Nylon
Material of Parts	Stainless Steel
Spare Blade	Two

Cutting Tool

CT14



Code	CT14
Description	Cutting Tool for 1/4" RF Cable
Main Material	Aluminum Alloy
Material of Parts	Stainless Steel
Spare Blade	Two







CUTTING TOOL
CT78



HX Code	CT78
Description	Cutting Tool for 7/8" RF Cable
Main Material	Plastic
Material of Parts	Stainless Steel
Spare Blade	Two



Wire stripper instruction

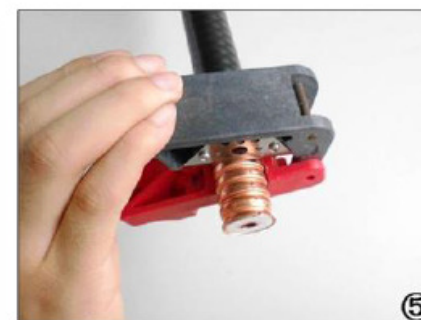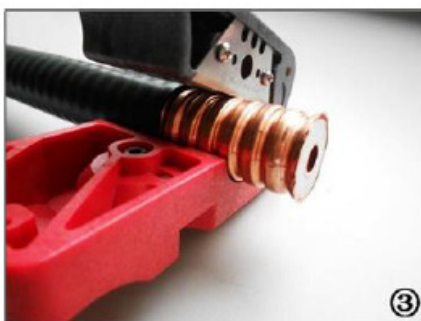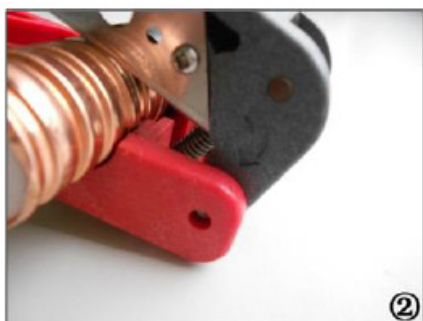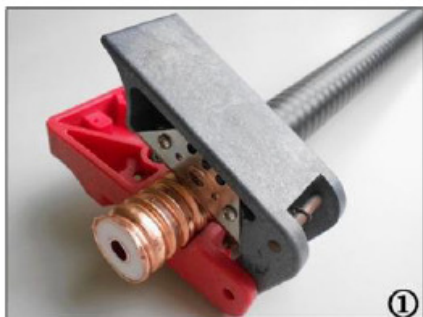

1. Strip the jacket of the cable , put the cable in the slot of the stripper
2. Make the blade on the wave of the cable
3. Keep the trough in the slot
- 4-5. Turn the stripper 3-4 rounds in a clockwise direction along the direction of the arrow,



INSTRUCTION DE MONTAGE


hold the cable still

6. Remove the redundant part, make the surface smooth

Connector Installation—7/16F-7/8"L



7/16F-7/8"L

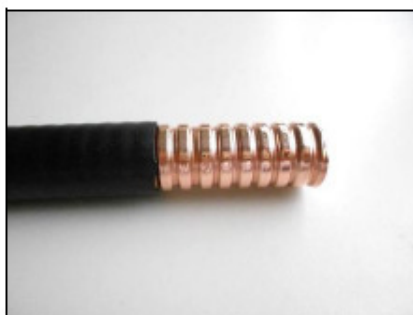

HCTAY-50-22




tools

Proceed as follows:



(1)

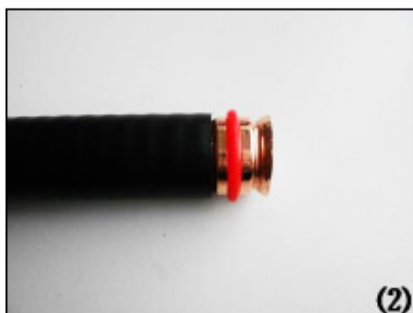

(2)



(3)




(4)




(5)



(6)

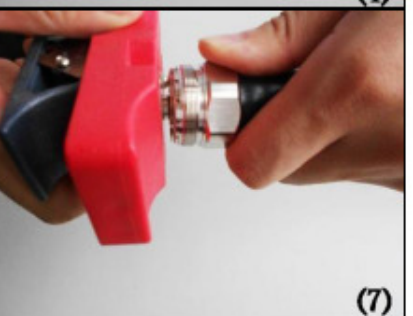


(7)

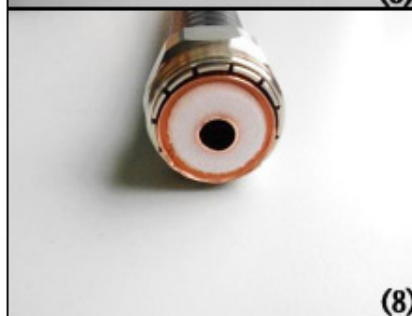

(8)



INSTRUCTION DE MONTAGE

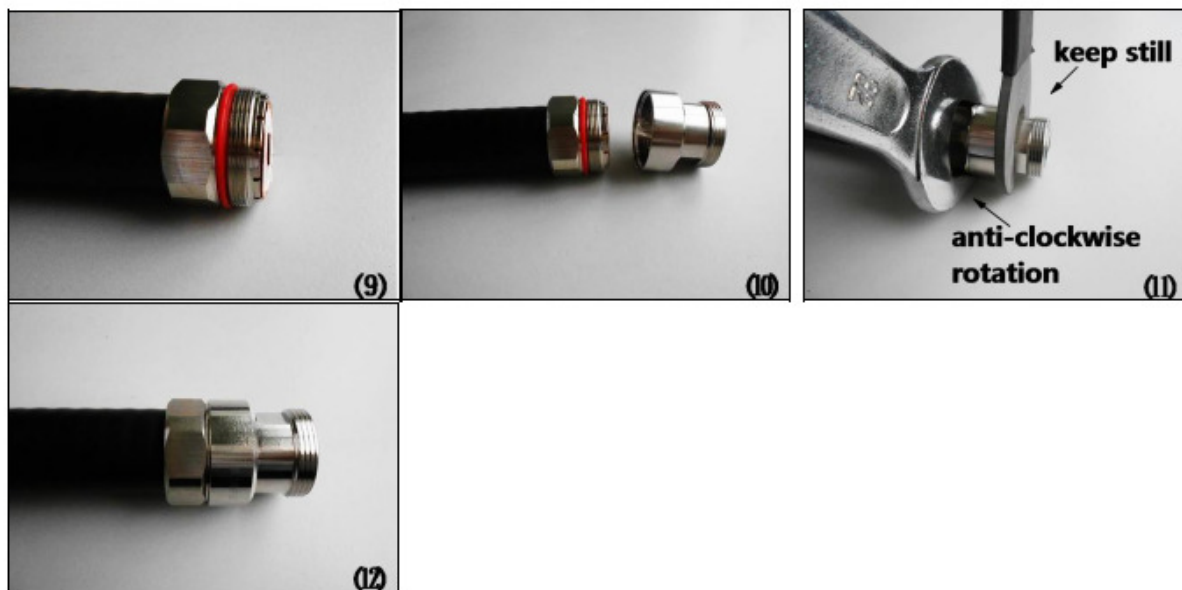

Connector Installation—NM-1/2"H




NM-1/2"H

HRCAY-50-9

tools

Proceed as follows:

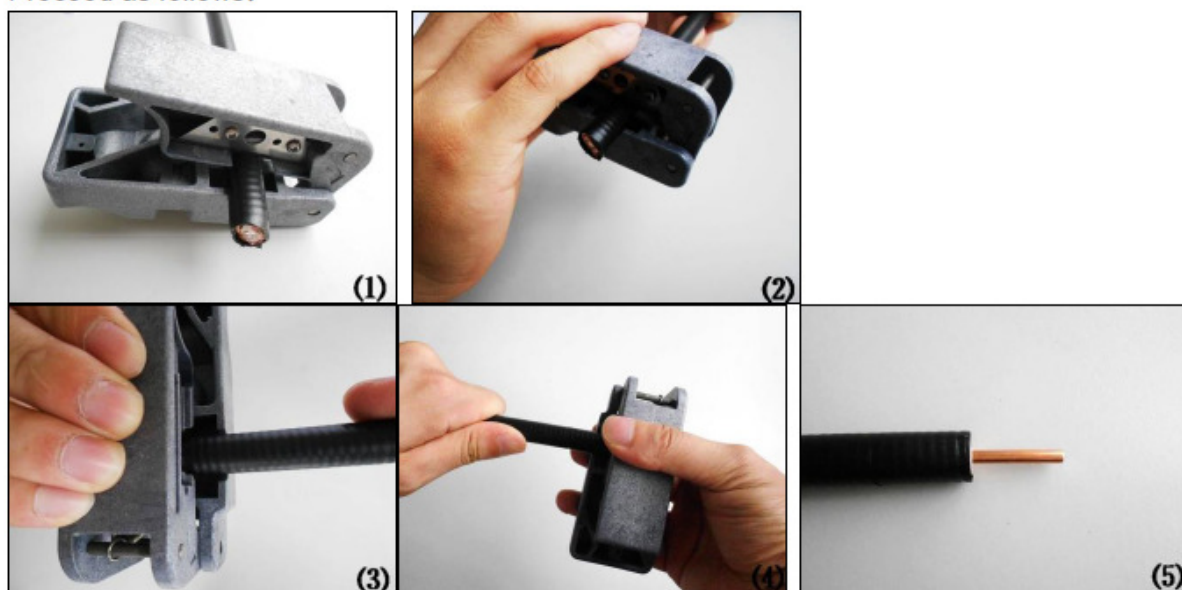



INSTRUCTION DE MONTAGE

